

4" & 6" 5-CCT RECESSED DOWNLIGHTS (2-PACK)

DESCRIPTION:

The 4" and 6" CCT Recessed Downlights offer adjustable color temperatures of 2700K, 3000K, 3500K, 4000K, or 5000K for optimal lighting. Operating at 120V, these dimmable downlights feature durable polycarbonate/plastic construction with an aluminum reflector in an architectural white finish and are designed for easy installation in existing housings. Rated for damp locations, they are suitable for residential and commercial settings.



FEATURES:


- 5-CCT Adjustable: Select from 2700K, 3000K, 3500K, 4000K, or 5000K to suit different lighting preferences.
- Durable Construction: Polycarbonate/plastic construction with an aluminum reflector provides reliable, long-lasting performance.
- Dimmable: Triac dimming capability for personalized lighting control.
- Easy Installation: Designed for installation in existing recessed housings using an E26 socket adapter.
- Architectural White Finish: Clean white finish designed to complement a variety of interiors.
- Removable Trim Options: Black, Brushed Nickel, and Bronze trims are available separately.
- Long Lifespan: Provides 50,000+ hours of reliable lighting.
- 5-Year Warranty: Backed by a 5-year warranty.
- Damp Location Rated: Suitable for damp locations.



- **4" Model Features**
- Simple clip-in installation
- Even, shadowless illumination without halo or shadows
- Compatible with most Triac dimmers from 100%–5%
- Baffle or smooth finish options

- **6" Model Features**
- Quick Connect with E26 base adapter for easy installation and wiring
- High-quality aluminum and plastic construction
- Energy saving: 80% more than halogen bulbs
- Replaces 85W incandescent / 120W halogen

DIMENSIONS:

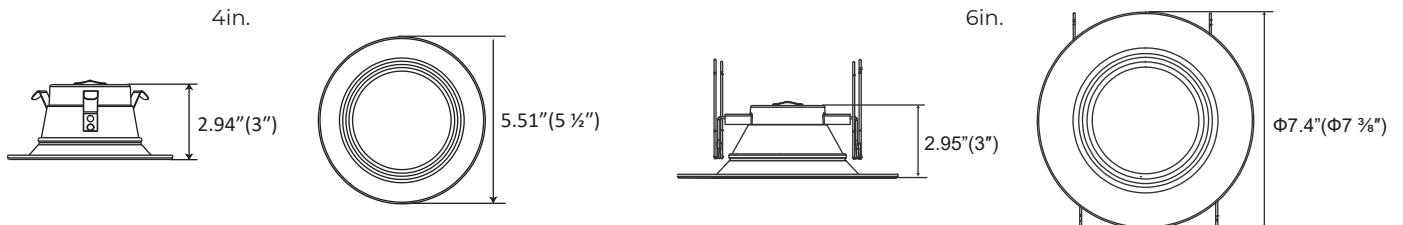

TECHNICAL SPECIFICATIONS - 4INCH:

Voltage	120V
Power Frequency	60Hz
Power Factor	>0.9
Color Temperature	5CCT (2700K, 3000K, 3500K, 4000K, 5000K)
Lumens	670lm, 707lm, 736lm, 752lm, 744lm
Beam Angle	100°
Material	Polycarbonate (PC) + Aluminum (AL)
Lifespan	≥50,000 hours
Operating Temp	-4°F to 113°F
Dimmable	Triac Dimming
Rating	Suitable for Damp Locations
CRI	90
Warranty	5 Year

APPLICATIONS:

- Residential Spaces
- Hospitality
- Retail and Commercial Spaces
- Educational Facilities
- Decorative Installations

TECHNICAL SPECIFICATIONS - 6INCH:

Watts (W)	15W
Size	6"
Voltage	120V
Power Factor	>0.9
Lumen Output	969lm (2700K), 1035lm (3000K), 1110lm(3500K), 1158lm(4000K), 1093lm(5000K)
Color Temperature	5CCT Switchable 2700K/3000K/3500K/4000K/5000K
Energy saving	80% more than halogen bulbs
Base	E26
Beam Angle	100°
Dimmable	Triac Dimming
Replaces	85W incandescent 120W halogen
Dimensions	7.36in. x 7.36in. x 3.91in.
Working Temperature	-4°F~122°F
CRI	90
Rating	Suitable for Damp Locations
Lifespan	>50,000 hrs
Warranty	5-years

APPLICATIONS:

- Kitchens
- Dining Rooms
- Hallways
- Living Rooms
- Offices

IMPORTANT SAFETY INFORMATION:

Before beginning assembly, installation, or operation of this product, please read and understand this entire manual. Failure to follow these instructions may result in a risk of fire or electric shock. Installation of this retrofit kit should be performed only by individuals familiar with the luminaire's electrical system and associated hazards. If not qualified, contact a licensed electrician.

WARNINGS:

- Risk of fire or electric shock. This kit should only be installed in luminaires with the specified construction features and dimensions shown in the accompanying diagrams. The retrofit kit's input rating must not exceed the luminaire's input rating.
- Avoid wiring damage or abrasion by preventing exposure to sharp edges of sheet metal or other objects.
- This retrofit kit is accepted as part of a luminaire where the combination's suitability is determined by relevant authorities. A qualified electrician must install it in accordance with all applicable electrical codes. This guide does not replace local or national electrical installation regulations.
- Exercise caution when drilling to avoid damaging luminaire wiring, the power supply, or other components. Only specified open holes may be made or altered according to installation diagrams, and no additional open holes should be left in wiring or electrical enclosures.
- This device is not designed for use with emergency exits.
- Suitable for damp locations.


ORDERING GUIDE:

SKU: DWN-NUR-CCT-R-4/5/6-10W(2Pack)/15W(2Pack)			
Item	Type	Size	Wattage
DWN-NUR	CCT-R	4	10W(2Pack)
		5/6	15W(2Pack)

BEFORE INSTALLATION:

- Ensure the power is turned off at the fuse box.

INSTALLATION GUIDE - 4INCH:

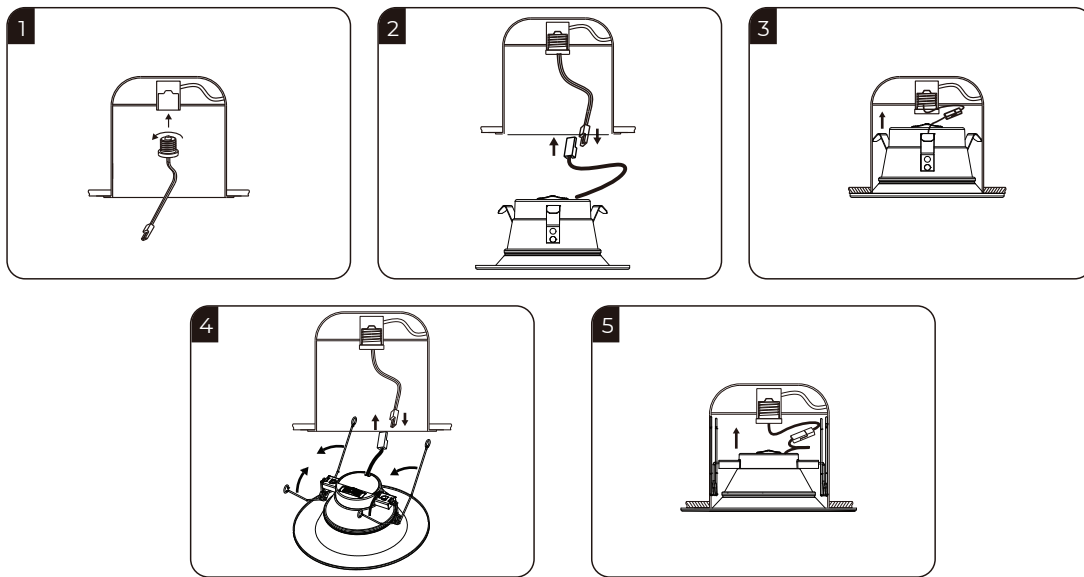


TURN OFF POWER: SWITCH OFF POWER AT THE ELECTRICAL PANEL.

Step 1: Install E26 Socket Adapter: Screw the E26 socket adapter into the existing socket (see Fig. 1).

Step 2: Connect Terminals: Attach the terminals from the E26 socket adapter to the fixture (see Fig. 2, Fig. 5).

Step 3: Install Fixture in Ceiling (4" Retrofit): Push the fixture into the can, ensuring it sits flush with the ceiling (see Fig. 3).

INSTALLATION GUIDE - 6-INCH:

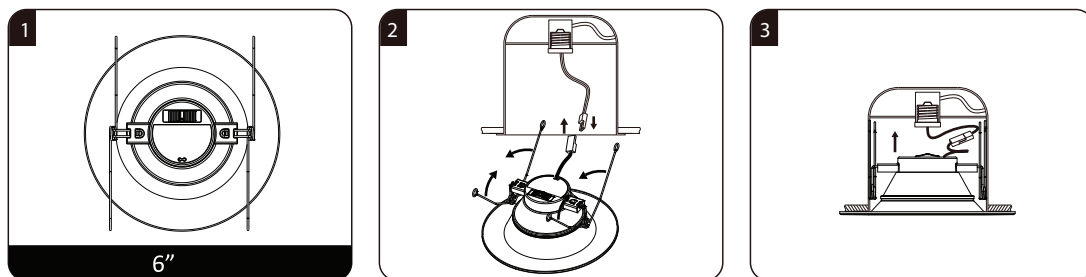

TURN OFF POWER AT FUSE BOX BEFORE INSTALLING:

STEP 1: Screw the E26 socket adapter into the existing socket.

STEP 2: Connect the terminals from E26 socket adapter to the fixture.

STEP 3: Press spring clips together, push fixture up into can and release once in, continue pushing until flush with ceiling.

REMOVING LED LUMINAIRE:

1. Trim Ring Release: Gently pull down on the trim ring until the fixture stops.

2. Fixture Detachment: Squeeze the torsion springs together and carefully remove the LED fixture.

3. Electrical Disconnection: Disconnect the fixture from the E26 socket adapter.

4. Adapter Removal: Unscrew the E26 socket adapter from the recessed can.

Note: Ensure the power is switched off before attempting any maintenance or removal procedures.

TRIMS (SOLD SEPARATELY):

Our 4-inch trim is compatible with our 4" CCT Downlights, offering an easy way to enhance your lighting setup. Available in three stylish finishes—Black, Brushed Nickel, and Bronze—this trim allows you to customize the look of your downlights to match your decor. Each trim is sold individually, giving you the flexibility to mix and match colors for a personalized lighting solution.

- Designed for use with our 4" CCT Downlights
- Available finishes: Black, Brushed Nickel, and Bronze
- Sold individually for mix-and-match customization



SKU: DWN-TRIM-4-BK



SKU: DWN-TRIM-4-BN



SKU: DWN-TRIM-4-BNZ

TRIMS (SOLD SEPARATELY):

Our 6-inch trim is compatible with our 6" CCT Downlights, offering an easy way to enhance your lighting setup. Available in three stylish finishes—Black, Brushed Nickel, and Bronze—this trim allows you to customize the look of your downlights to match your decor. Each trim is sold individually, giving you the flexibility to mix and match colors for a personalized lighting solution.

- Designed for use with our 6" CCT Downlights
- Available finishes: Black, Brushed Nickel, and Bronze
- Sold individually for mix-and-match customization



SKU: DWN-TRIM-6-BK



SKU: DWN-TRIM-6-BN



SKU: DWN-TRIM-6-BNZ

UNIVERSAL CONSTRUCTION PLATE (SOLD SEPARATELY):

Our universal new construction plate is compatible with 4" and 6" CCT Downlights. Made of durable galvanized iron with adjustable bars for easy installation in joist and T-grid applications.

- Compatible with 4" and 6" CCT Downlights
- Adjustable mounting bars
- Suitable for joist and T-grid applications

SKU: NUR-DWN-TRIM-UNI

